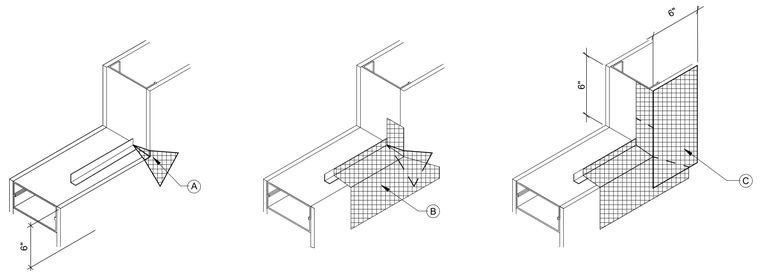

Ⓐ INSTALL GUSSETS TO PREVENT PIN HOLES.

Ⓑ APPLY FLASHING MEMBRANE ON VERTICAL LEG OF METAL ANGLE AND EXTEND 3" ONTO SHEATHING

Ⓒ EXTEND FLASHING MEMBRANE 6" UP JAMB AT CORNER TO CREATE SILL PAN

SILL PAN DETAIL | D1
3" = 1'-0"

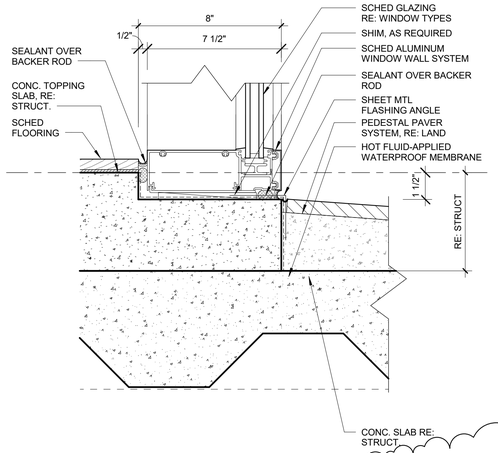

WINDOW WALL SILL @ LVL 3 | C2
3" = 1'-0"

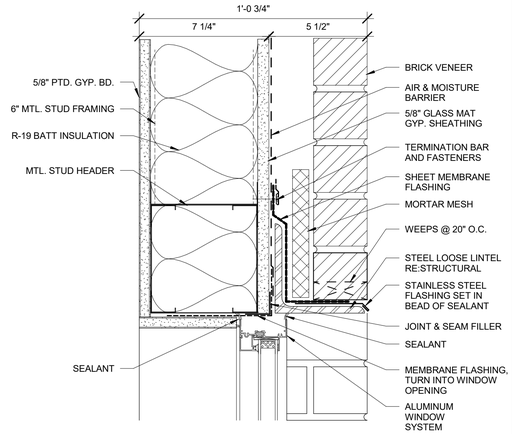

WINDOW HEAD - TYP | C1
3" = 1'-0"

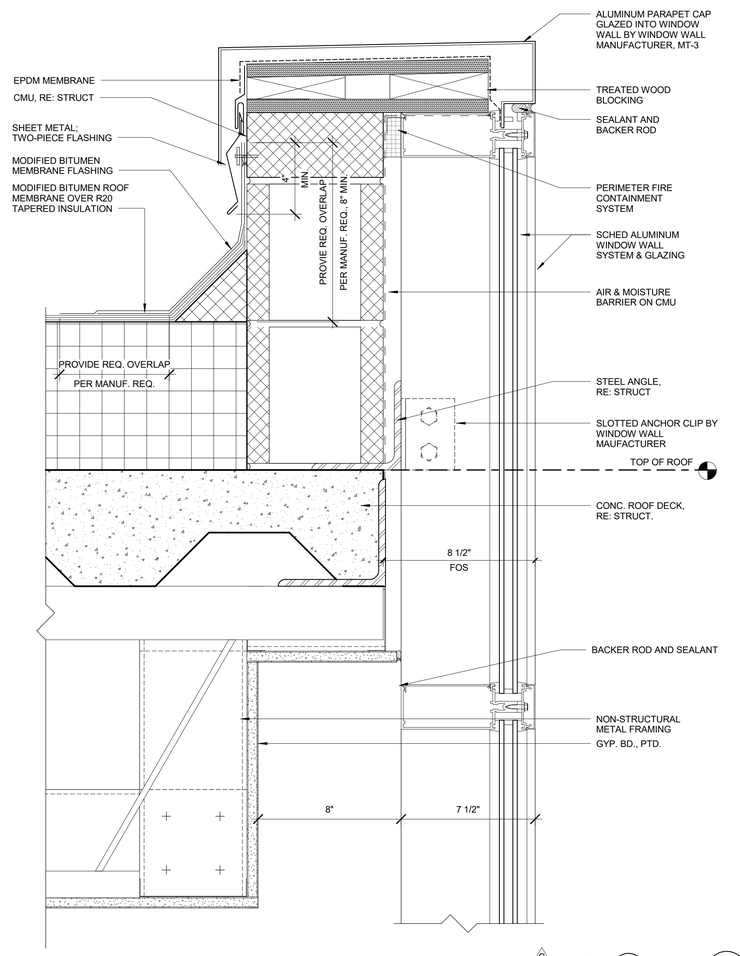

WINDOW WALL HEAD @ PARAPET | A4
3" = 1'-0"

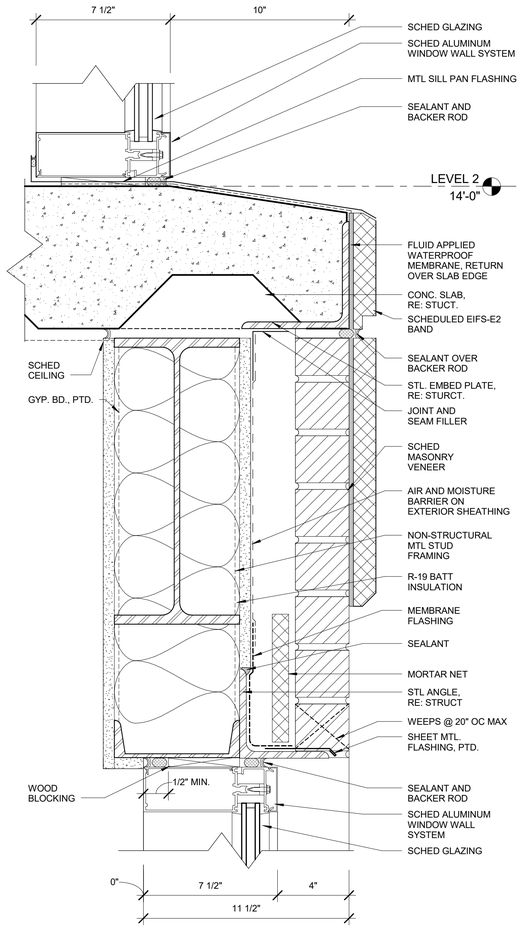

WINDOW WALL HEAD/SILL | A3
3" = 1'-0"

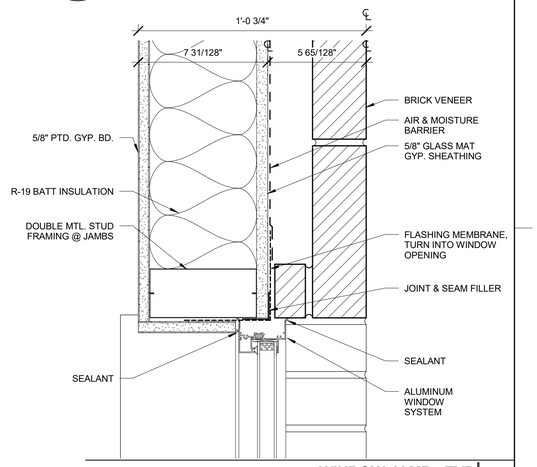

WINDOW JAMB - TYP | B1
3" = 1'-0"

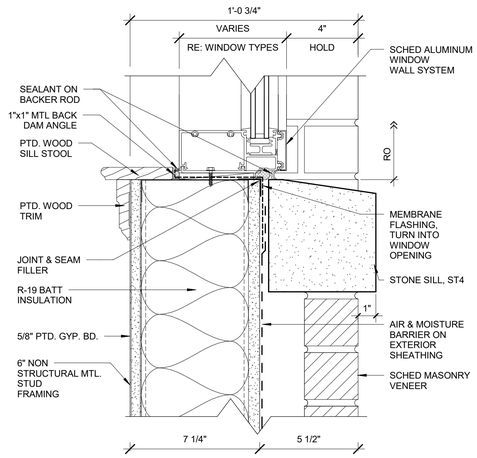

WINDOW WALL SILL - TYP | A1
3" = 1'-0"

O 281 410 1349
www.wsquaredarch.com
W [SQUARED] ARCHITECTS

ISSUES AND REVISIONS

NO	DATE	DESCRIPTION
B	19 AUG 16	ISSUE FOR BID
C	19 AUG 26	ADDENDUM 2

REGISTERED ARCHITECT — JOHANNE C. WILSON — STATE OF TEXAS — 2019 AUG 16

GH SCHOOL
4780 N MAIN STREET

SHEET TITLE
WINDOW DETAILS

SHEET NUMBER
A033
PROJECT # A041

©2019 W SQUARED DESIGN, INC.
Architect shall own the overall conceptual design prepared and developed for the project on the intangible exclusive rights or copyright therein.

W:\CloudStation\19.05-GHS_DWG\1902-GHS-Model_ArchR16.rvt
8/26/2019 5:10:16 PM