

O 281 410 1349
www.wsquaredarch.com

W [SQUARED] ARCHITECTS

ROOM FINISH SCHEDULE table with columns: ROOM NAME, ROOM NUMBER, FLOORING, WALLS (NORTH, EAST, SOUTH, WEST), CEILING, REMARKS. Includes rooms like LOBBY, STAIR 1, DIRECTOR, HALL, CLASSROOM, ACTIVITY, MEN, WOMEN, KITCHEN, ELEV, etc.

*NOTE: AA - SEE ELEVATIONS

ROOM FINISH SCHEDULE | C3
12" = 1'-0"

APPLIANCE SCHEDULE table with columns: ABBREVIATION, ITEM, DESCRIPTION, REMARKS. Includes DW-1 (DISH WASHER), RF-1 (REFRIGERATOR), GD-1 (GARBAGE DISPOSAL), MW-1 (MICROWAVE).

APPLIANCE SCHEDULE | B4
12" = 1'-0"

BATHROOM ACCESSORY SCHEDULE table with columns: ABBREVIATION, ITEM, DESCRIPTION, REMARKS. Includes SD-1 (LIQUID SOAP DISPENSER), TR-1 (TRASH RECEPTACLE), TP-1 (TOILET PAPER HOLDER), ND-1 (SANITARY NAPKIN DISPOSAL).

BATHROOM ACCESSORY SCHEDULE | A4
12" = 1'-0"

EXTERIOR FINISH SCHEDULE table with columns: ABBREVIATION, ITEM, DESCRIPTION, REMARKS. Includes AR-1 (ARRISGRAPT MASONRY UNITS), BR-1 (BRICK VENEER), GL-IV (VISION GLASS), GL-IVT (TEMPERED VISION GLASS), GL-15 (SPANDREL GLASS), GL-15T (TEMPERED SPANDREL GLASS), GL-1F (FROSTED GLASS), HPS-1 (HIGH PERFORMANCE COATING), HPS-2 (HIGH PERFORMANCE COATING), PV-1 (CONCRETE PAVERS), SP-1 (STUCCO PLASTER), TC-1 (TRAFFIC COATING).

EXTERIOR FINISH SCHEDULE | C1
12" = 1'-0"


INTERIOR FINISH SCHEDULE table with columns: ABBREVIATION, ITEM, DESCRIPTION, REMARKS. Includes AL-1 (BRUSHED ALUMINUM), AL-2 (KYNAR COATED ALUMINUM), AC-1 (ACRYLIC PANEL), B-1 (WALL BASE), C-1 (DRYWALL CEILING), C-2 (ACOUSTICAL TILE CEILING), C-3 (ACOUSTICAL TILE CEILING), CT-1 (CERAMIC TILE (FLOOR)), CT-2 (CERAMIC TILE (FLOOR)), CT-3 (CERAMIC TILE (WALL)), CT-4 (CERAMIC TILE (WALL)), CPT-1 (CARPET TILE), GL-1 (TEMPERED GLASS), GL-2 (GLASS), GL-21 (TEMPERED GLASS), GL-3 (TEMPERED GLASS), GL-4 (TEMPERED GLASS), ML-1 (STAINLESS STEEL), PL-1 (PLASTIC LAMINATE), PL-2 (PLASTIC LAMINATE), PL-3 (PLASTIC LAMINATE), PT-1 (PAINT), PT-2 (PAINT), PT-3 (PAINT), PT-4 (PAINT), PT-5 (PAINT), PT-6 (PAINT), PT-7 (PAINT), SC (SEALED CONCRETE), SC-1 (SINK COUNTER TOP), SC-2 (SINK SURFACE), VCT-1 (VINYL TILE).

NOTES:
1) ALL WALLS PT-1 UNO.
2) ALL BASE TO BE B-1 UNO.
3) ALL FLOOR TILE TO HAVE EPOXY GROUT

INTERIOR FINISH SCHEDULE | A1
12" = 1'-0"

ISSUES AND REVISIONS

Table with columns: NO, DATE, DESCRIPTION. Includes revisions A (19 JUL 22), B (19 AUG 16), C (19 AUG 26).

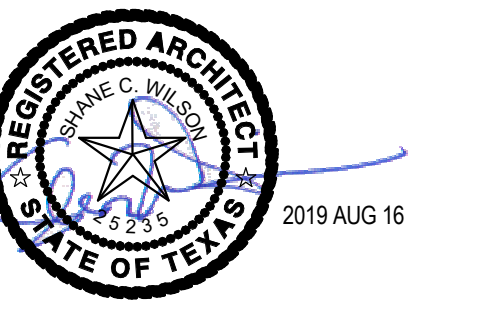

GH SCHOOL
4780 N MAIN STREET

SHEET TITLE
FINISH SCHEDULE AND DETAILS

SHEET NUMBER

A041
A041

PROJECT #

W:\Client\Sherrin\10_05_GHS\DWG\1902_GHS_Model_AnaR16.rvt
8/26/2019 5:10:15 PM

D

C

B

A

5 |

4 |

3 |

2 |

1 |